

ADAGIO +

Ultra thin POOL & SPA LED lamp



GENERAL SPECIFICATION	
Maximum Water Temperature: +40°C The lamps have to be kept out of ice zones.	Input voltage: Minimum 8VAC 50Hz/60Hz Nominal 12VAC 50Hz/60Hz Maximum 14VAC 50Hz/60Hz
International Protection Rating: IPx8 submerged max 2 meter	Thickness: 12 - 20mm depending front ring type
ADAGIO PLUS Pool Lamps must be completely submerged into water during operation!	

PART NUMBER	LAMP TYPE (*) (to be combined with front ring)	INPUT POWER	CABLE (**)	LIGHT OUTPUT (***)
PLA100-WH	WHITE Outer diameter = 10cm	35W	2 wires	2700 lm
PLA170-WH	WHITE Outer diameter = 17cm	65W	2 wires	5400 lm

(*) Wide choice of front rings in Polymer or Stainless steel optionally available


(**) Supplied cable length is 4 meters for all lamps

(***) Typical initial luminous flux @ water temperature +25°C and 12VAC lamp voltage

INSTALLATION INSTRUCTIONS

1. Connect electrical cord to lamp housing
2. Install front ring (optionally available)
Turn until it clicks in place
3. Install lamp in pool
Leave excess wire and twist cord in conduit.

ELECTRICAL CONNECTION

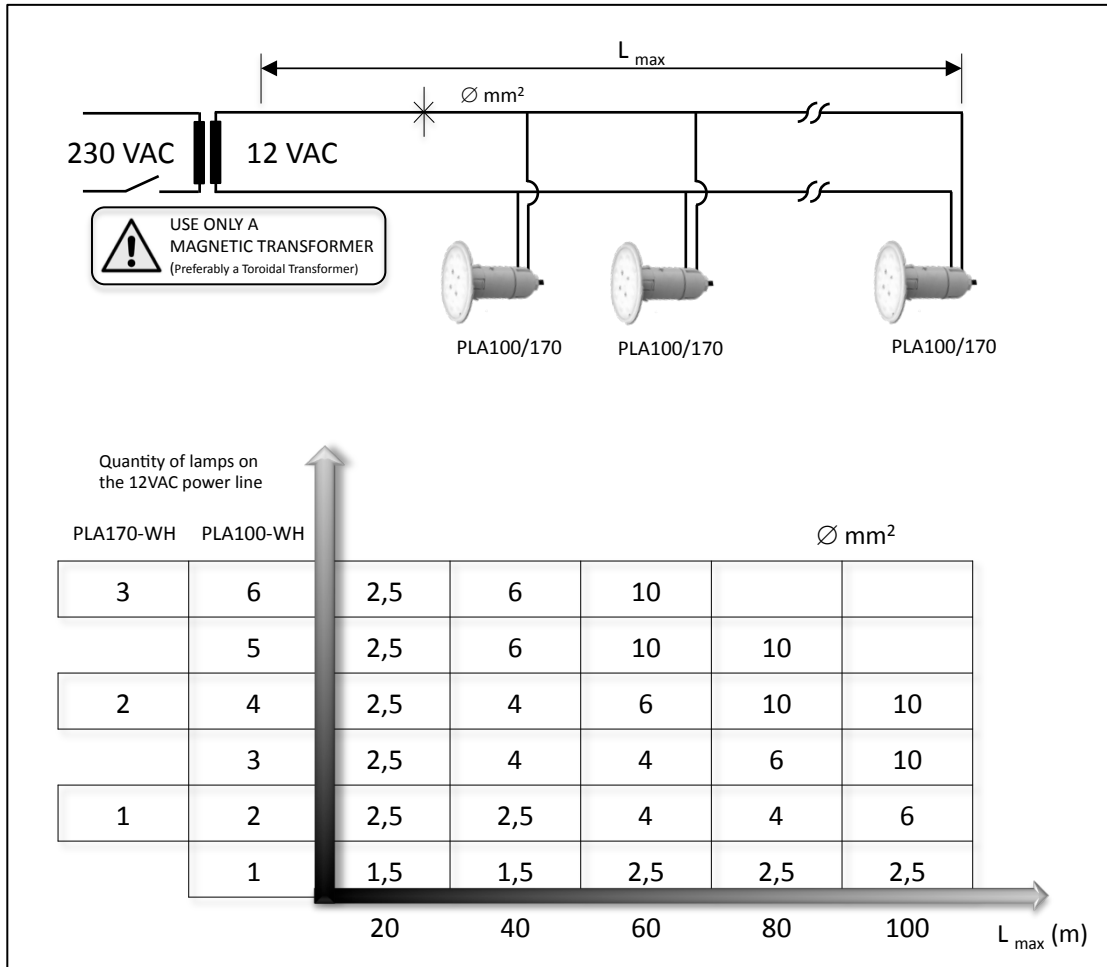

RETROFIT WITH PAR56 NICHE (ONLY PLA170)

